

3602HP & 3602

Features:


- Swing arm design with unconventional cabinet shape requires less floor space in your shop.
- Two position bead breaker arm accommodates large wheels and tires.
- Twin clamping cylinders provide more power to hold the most difficult rims.
- Five year turntable transmission parts warranty
- Standard water separator and air oiler ensure long service life.
- Double acting bead breaker air cylinder eliminates shock or damage when bead breaks loose.
- Pressure limiter reduces risk of over inflation.



Model 3602HP Shown*

Specifications:

Tire Diameter	40"	1016 cm
Tire Diameter	40"	1016 cm
Rim/Tire Assembly Width	12"	305 mm
Rim Width	15"	375 cm
Rim Diameter/Outside Clamping	10- 21"	254-533 mm
Rim Diameter/Inside Clamping	12-24"	305-610 mm
Bead Breaking Power	5600 lbs.	2541 kg
Air Pressure Requirement	110-170 psi	7.5-11.7 bar
Motor	1 HP	
Electrical Requirement	120 vac; 20 A; 60 hz	
Weight	509 lbs.	231 kg
Overall Dimensions: Width	30"	762 mm
Depth	50"	1270 mm
Height	75"	1905 kg

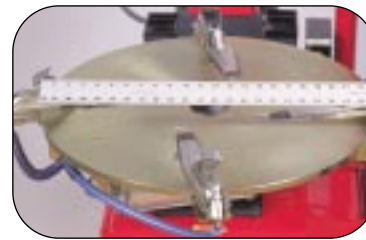

24" Turntable



Less confusing, bead breaker pedal on side of machine activates a 2 position bead breaker



Capable of changing rim diameter up to 31" with optional adapters